


Non-ferrous circular downlight for use in MRI rooms

Non-ferrous recessed downlighter luminaires for use in magnetic resonance imaging (MRI) rooms. Remote gear box and non-ferrous downlighter head designed specifically to meet the requirements of MRI rooms. Non-maintained emergency version also available.

Applications: MRI rooms.

- Non-ferrous construction, designed for use in MRI rooms
- Two output circuits per DALI gearbox where each circuit can power a minimum of 5 downlighter heads, up to a maximum of 8
- Downlighter wiring configured for low EMI when used with EMI filters (supplied by others)
- Emergency status indicator LED can be remotely mounted outside of the room
- DALI dimmable control gear as standard. Can be used with push to make retractive switch for dimming and switching

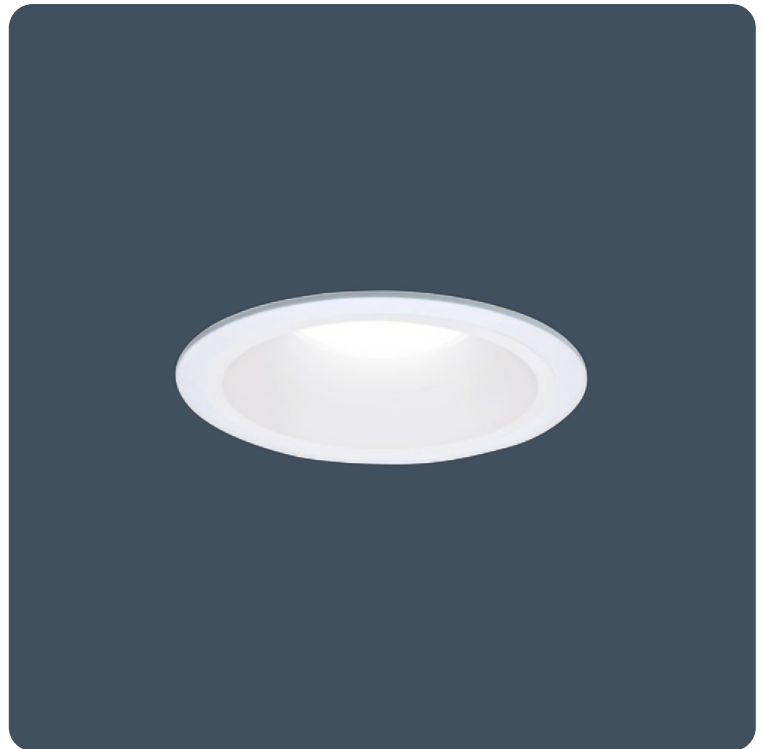

IP20

133.3 LL/CW

Specification

IP rating **IP20**

Lighting

Lumen output **1,600 lm** Efficacy **133.3 LL/CW**

Emergency data

Emergency lumen output **800 lm** Emergency type **Non-maintained**
 Emergency duration **3 hours** Battery specification **Nickel Metal Hydride (NiMH)**

Power

LED power **6 W - 11 W** Circuit power **12 W**


LED characteristics

CRI **80+** Colour temperature **4000 K**
 Rated life (hours) **100 K - L80/B10**

Compliance

UKCA Yes CE Yes

Dimensions





Cut-out - \varnothing 180
Minimum void depth - 110


LED Downlighter Power Unit



Emergency LED Downlighter Power Unit

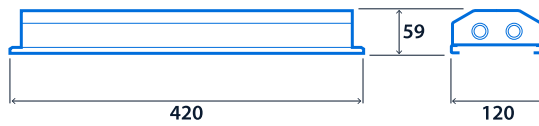

Click or scan here
View G3 MRI variants using
our online filtering tool



Information is correct as of 22 Feb 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.