

## LED controller luminaires

Long life, LED luminaires ideal for illumination of school classrooms, corridors, healthcare buildings and retail and storage areas. Increased luminaire efficacy consumes less power than comparable T5 solution.

Applications: retail sales floor lighting, storage areas, school classrooms, toilets, corridors and health care buildings, data centres.

- Ultra slim profile
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP40

Up to 142.2 LL/CW

SMARTSCAN

LUXGUARD

## Specification

Mounting	Surface	IP rating	IP40
Max presence detection height	8 m		

## Lighting

Optic	Opal diffuser	Lumen output	3,555 lm - 9,465 lm
Efficacy	Up to 142.2 LL/CW		

## Emergency data

Emergency lumen output	565 lm - 575 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

## Power

LED power	21 W - 63 W	Circuit power	25 W - 71 W
-----------	-------------	---------------	-------------

## LED characteristics


CRI	80+	Colour temperature	4000 K
Rated life (hours)	90 K - L80/B10		

## Compliance


UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class B		

## Dimensions

### Narrow Body

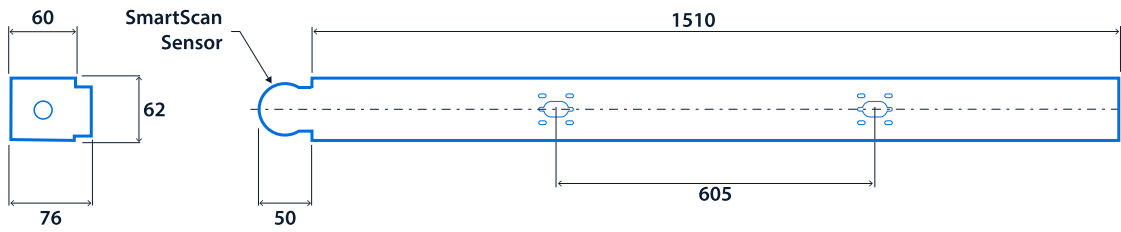

### Wide Body

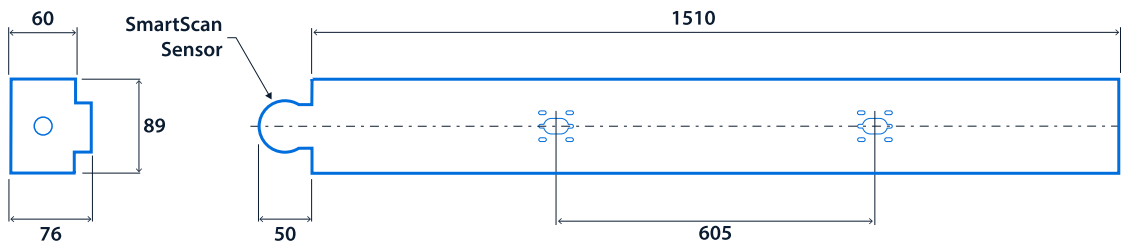

Narrow body



Wide body





**Click or scan here**  
View Kanby LED Controller variants using our online filtering tool



Information is correct as of 12 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.