

# Kanby LED Controller CA

## Colour temperature changing LED controller luminaires

Tunable white, long life, LED luminaires ideal for illumination of school classrooms, corridors, healthcare buildings and retail and storage areas.

Applications: retail sales floor lighting, storage areas, school classrooms, toilets, corridors and health care buildings, data centres.

- Fitted with 3000 K and 6500 K LEDs for colour temperature control
- Ultra slim profile
- ColourActive versions feature SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP40

Up to 119.9 LL/CW



## Specification

Mounting	Surface	IP rating	IP40
Nominal size	1500 mm		

## Lighting

Optic	Opal diffuser	Lumen output	4,075 lm - 4,845 lm
Efficacy	Up to 119.9 LL/CW		

## Emergency data

Emergency lumen output	605 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

## Power

LED power	30 W - 37 W	Circuit power	34 W - 42 W
-----------	-------------	---------------	-------------


## LED characteristics

CRI	80+	Colour temperature	3000 - 6500 K
Rated life (hours)	59 K - L80/B10		

## Compliance

UKCA	Yes	CE	Yes
------	-----	----	-----

## Dimensions

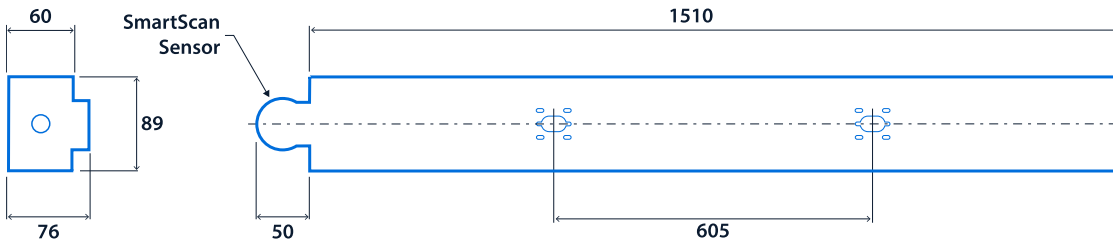

**Click or scan here**  
View Kanby LED Controller CA  
variants using our online  
filtering tool



Information is correct as of 12 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.