

## Multi-purpose, anti-ligature and corrosion-resistant luminaires

Robust and durable luminaires with a polycarbonate cover. Extruded aluminium body with die-cast ends. Long life silicone sponge gasket ensuring IP66 rating. Cover secured using tamper-resistant pin Torx screws.

- Robust and durable extruded aluminium body dissipates heat, ensuring long control gear life in higher ambient temperatures
- High impact-resistant, flame-retardant polycarbonate cover
- Cover secured using tamper-resistant T25 pin Torx screws
- Removable gear tray, hangs on safety straps for easy maintenance
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP66

IK10

Up to 172 LL/CW

SMARTSCAN

LUXGUARD

### Specification

|                               |         |              |                    |
|-------------------------------|---------|--------------|--------------------|
| Mounting                      | Surface | IP rating    | IP66               |
| Impact rating                 | IK10    | Nominal size | 1200 mm<br>1500 mm |
| Max presence detection height | 4 m     |              |                    |

### Lighting

|          |                 |              |                     |
|----------|-----------------|--------------|---------------------|
| Optic    | Clear cover     | Lumen output | 3,030 lm - 8,145 lm |
| Efficacy | Up to 172 LL/CW |              |                     |

### Emergency data

|                        |                 |                       |                             |
|------------------------|-----------------|-----------------------|-----------------------------|
| Emergency lumen output | 560 lm - 630 lm | Emergency type        | Maintained                  |
| Emergency duration     | 3 hours         | Battery specification | Nickel Metal Hydride (NiMH) |

### Power

|           |             |               |             |
|-----------|-------------|---------------|-------------|
| LED power | 16 W - 44 W | Circuit power | 21 W - 55 W |
|-----------|-------------|---------------|-------------|


## LED characteristics

|                    |                 |                    |        |
|--------------------|-----------------|--------------------|--------|
| CRI                | 80+             | Colour temperature | 4000 K |
| Rated life (hours) | 100 K - L70/B10 |                    |        |

## Compliance

|                         |   |    |     |
|-------------------------|---|----|-----|
| UKCA                    | Yes   | CE | Yes |
| Energy efficiency class | This product contains a light source of energy efficiency class B |    |     |

## Dimensions

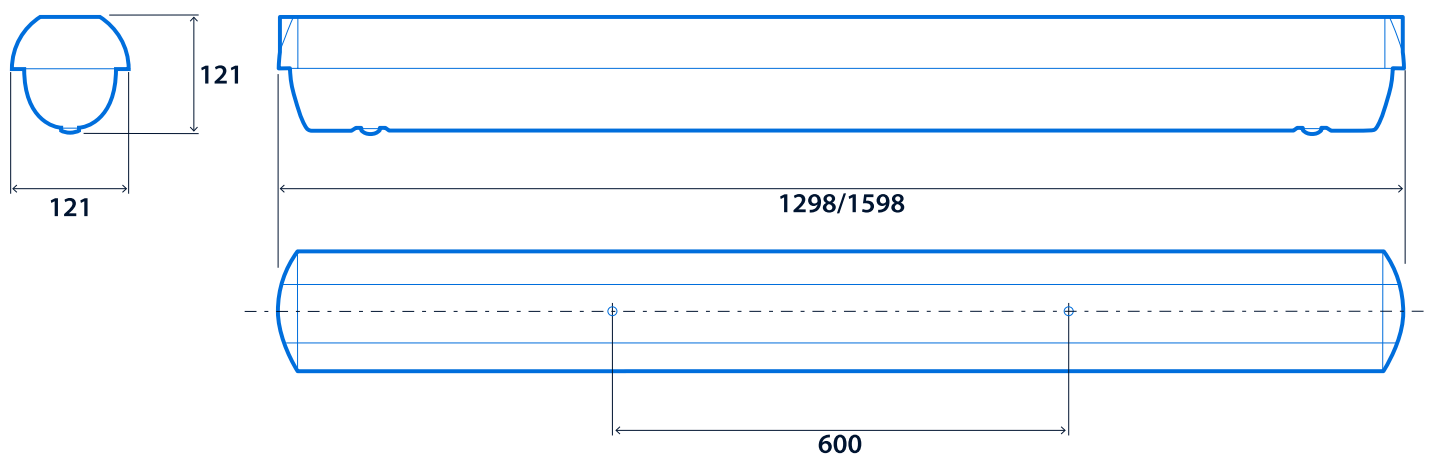



## Click or scan here

View A-Line AL variants using  
our online filtering tool



Information is correct as of 22 Feb 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.