

Wall mounted emergency luminaires with SmartScan wireless technology

LED emergency luminaires for wall mounting with SmartScan wireless communication. Superb optical performance means fewer luminaires are required. Three hour, non-maintained emergency operation.

Applications: stairwells and corridors.

- Ideal for use in stairwell or corridor applications
- Three hour, non-maintained emergency operation
- Low power consumption (2 W total)
- Status indicator shows operational condition
- Simple to install, full status reporting SmartScan wireless communication versions



IP20

0 LL/CW

Specification

| | | | |
|----------|---------|-----------|------|
| Mounting | Surface | IP rating | IP20 |
|----------|---------|-----------|------|

Emergency data

| | | | |
|------------------------|---------|-----------------------|---|
| Emergency lumen output | 180 lm | Emergency type | Non-maintained |
| Emergency duration | 3 hours | Battery specification | Lithium Iron Phosphate (LiFePO4) Nickel Metal Hydride (NiMH) |


Power

| | | | |
|-----------|-----|---------------|-------|
| LED power | 2 W | Circuit power | 2.5 W |
|-----------|-----|---------------|-------|

Compliance

| | |
|---|--|
| SmartScan wireless standards compliance | Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724 |
|---|--|

Dimensions

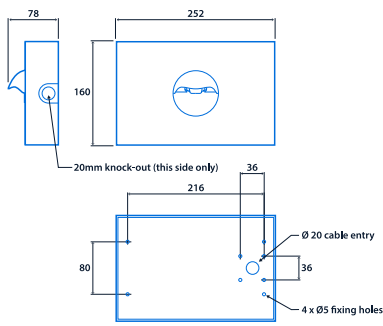

View the range



Information is correct as of 21 Nov 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.