Firefly AL



Anti-ligature emergency luminaires for recessed mounting with SmartScan wireless communication

Anti-ligature LED emergency luminaires for recessed mounting with SmartScan wireless communication. Secured using tamper-resistant pin Torx fixings. Discreet LED emergency luminaires with superb optical performance. Three hour, non-maintained emergency operation. Eco-Power pluggable battery reduces maintenance time and cost.

- Impact-resistant and anti-ligature
- Tamper-resistant T20 pin Torx screw fixings
- Pre-fitted 3 m lead option for connection into 6-pole or SmartScan 3-pole installations
- Low standby power consumption (1.7 W total)
- Easily replaceable Nickel Metal Hydride (NiMH) ECO-Power Pack battery
- Simple to install, full status reporting SmartScan wireless communication versions



IP65 (IP40 above ceiling) / IP20 control module

0 LL/CW



Specification

Mounting Recessed IP rating IP65 (IP40 above ceiling) / IP20

control module

Emergency data

Emergency lumen output 265 lm - 270 lm Emergency type Non-maintained

Emergency duration 3 hours Battery specification Nickel Metal Hydride (NiMH)

Power

LED power 2 W - 3 W Circuit power 3 W

Compliance


SmartScan wireless standards compliance

Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724

Firefly AL



Dimensions

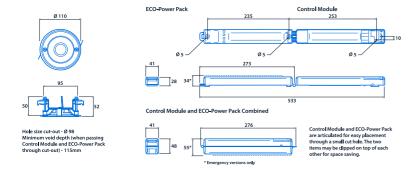



Information is correct as of 21 Nov 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.