High Dependency Modular

Recessed LED luminaires for use in high dependency / intensive care ward areas

Recessed luminaires with steel body and aluminium frame.

Two circuits with separate optics in one luminaire:

General Lighting - 56 W LED controlled via DALI gear behind a high efficiency Miro louvre delivering a controlled cut off for maximum patient comfort.

Examination Lighting - 56 W LED behind satin cover.

Applications: high dependency / intensive care hospital wards.

- Two circuits with separate optics in one luminaire - General Lighting - 56W LED controlled via DALI gear behind a high efficiency Miro louvre delivering a controlled cut off for maximum patient comfort / Examination Lighting - 56W LED (non-dimming) behind a satin polycarbonate diffuser
- Combination of both optical elements provides the full examination level of 1000 Lux
- Easy clean surface
- Extruded aluminium snap fix screw-less frame
- Supplied with side arm suspension kit

Notes: Dimming for louvre side only, two independent circuits in one luminaire. CRI 90 option available to special order.

IP54

Specification

Mounting	**Recessed**	IP rating	**IP54**
Nominal size	**600 x 600 mm**		

Power

LED power	**112 W**

LED characteristics

CRI	**80+**	Colour temperature	**4000 K**
Rated life (hours)	**50 K - L70/B10**		

High Dependency Modular

Compliance

UKCA	**Yes**	CE	**Yes**
Thermoplastic rating	**TP(a)**		

Dimensions

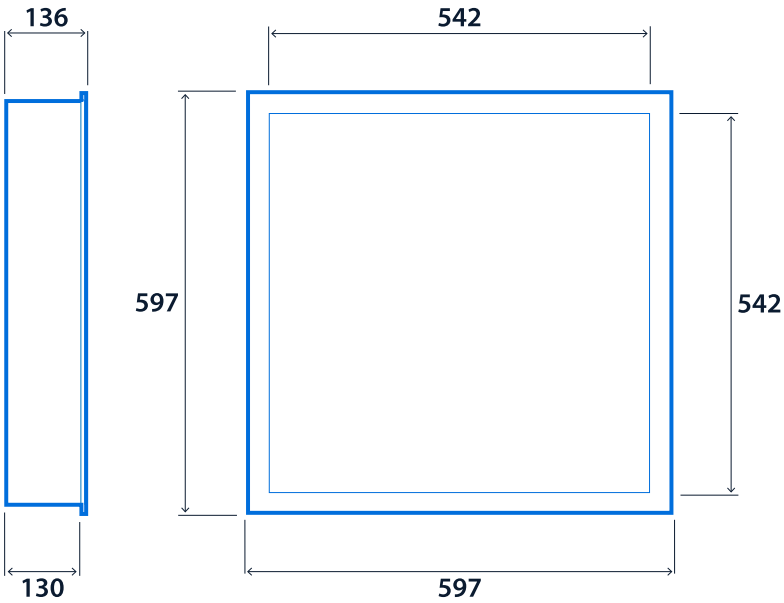

Click or scan here

View High Dependency Modular variants using our online filtering tool

High Dependency Modular