

Kanby LED Controller CA

Colour temperature changing LED controller luminaires

Tunable white, long life, LED luminaires ideal for illumination of school classrooms, corridors, healthcare buildings and retail and storage areas.

Applications: retail sales floor lighting, storage areas, school classrooms, toilets, corridors and health care buildings, data centres.

- Fitted with 3000 K and 6500 K LEDs for colour temperature control
- Ultra slim profile
- ColourActive versions feature SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP40 Up to 119.9 LL/CW SMARTSCAN LUXGUARD

Specification

Mounting	Surface	IP rating	IP40
Nominal size	1500 mm		

Lighting

Optic	Opal diffuser	Lumen output	4,075 lm - 4,845 lm
Efficacy	Up to 119.9 LL/CW		

Emergency data

Emergency lumen output	605 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	30 W - 37 W	Circuit power	34 W - 42 W
-----------	-------------	---------------	-------------


LED characteristics

CRI	80+	Colour temperature	3000 - 6500 K
Rated life (hours)	59 K - L80/B10		

Compliance

UKCA	Yes	CE	Yes
------	-----	----	-----

Dimensions

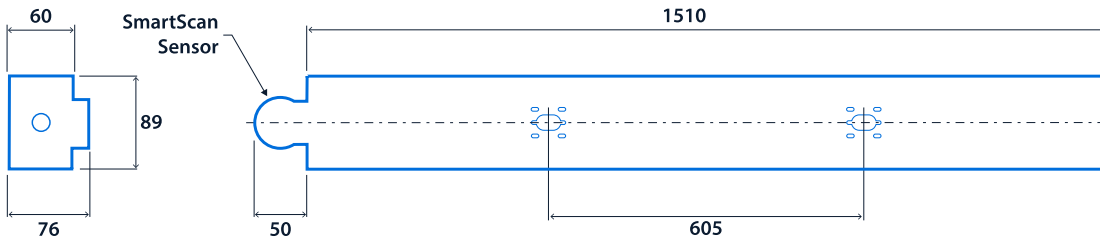

Click or scan here
View Kanby LED Controller CA
variants using our online
filtering tool



Information is correct as of 21 Jan 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.