


## Wall mounted up and downlighters

Wall mounted linear luminaires with upward and downward light component. Steel body finished in either white or black with opal polycarbonate diffusers. Can be mounted vertically as well as horizontally. Kast is ideal for corridors or stairwell applications.

Applications: corridors, stairwells, reception areas, meeting rooms, offices.

- Can be mounted horizontally or vertically
- Integral emergency and SmartScan emergency options
- SmartScan wireless technology removes the need for control cabling. Ideal for retrofit

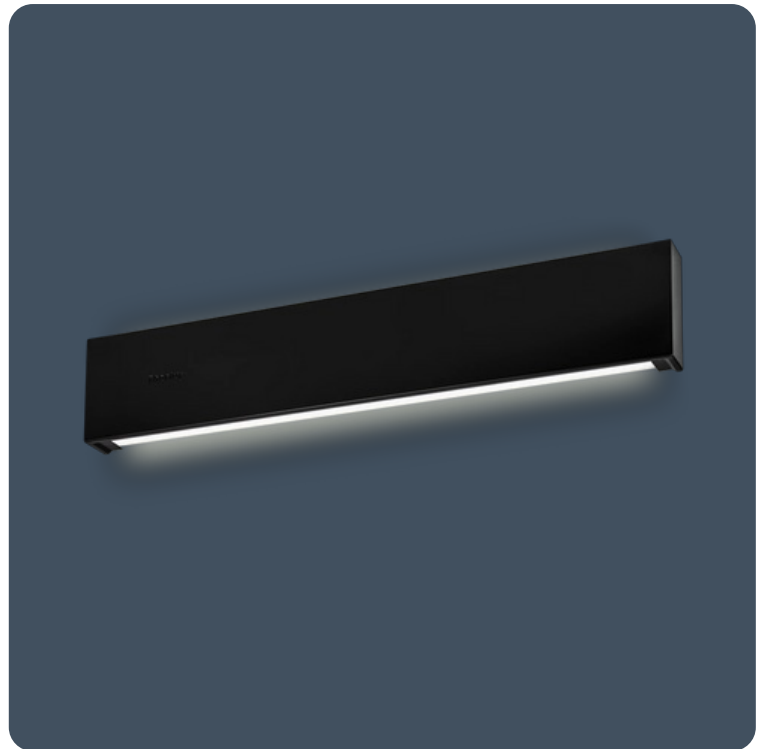

IP40

IK10

Up to 130 LL/CW

SMARTSCAN

LUXGUARD

## Specification

Mounting	Surface	IP rating	IP40
Impact rating	IK10	Max presence detection height	8 m

## Lighting

Optic	Opal diffuser	Lumen output	1,455 lm - 2,860 lm
Efficacy	Up to 130 LL/CW		

## Emergency data

Emergency lumen output	385 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

## Power

LED power	10 W - 20 W	Circuit power	12 W - 22 W
-----------	-------------	---------------	-------------



## LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	67 K - L80/B10		

## Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class B		

## Dimensions

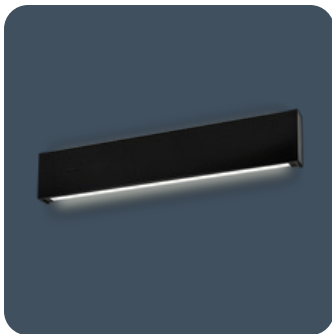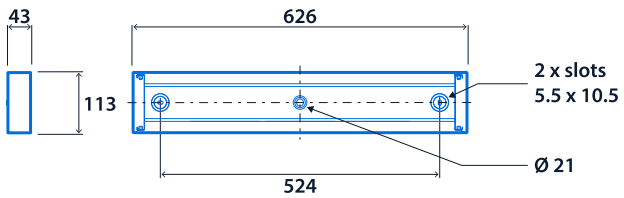



**Click or scan here**  
View Kast variants using our  
online filtering tool



Information is correct as of 12 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.