

## Adjustable recessed accent downlights

Recessed mounted display luminaires. 355° azimuth adjustment and a 60° vertical adjustment. 5 W or 8 W versions.

Applications: reception areas, retail, display, halls of residence, hotels, restaurants, museums.

- Spot 21° and Flood 45° beam angle versions
- 355° azimuth adjustment
- 60° vertical adjustment
- Supplied with remote gear unit fitted with 2 m lead
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications

Notes: Black and silver finishes and CRI 80 version available to special order (minimum order quantity applies)



IP20

Up to 87.5 LL/CW

### Specification

Mounting	Recessed	IP rating	IP20
----------	----------	-----------	------

### Lighting

Lumen output	455 lm - 775 lm	Efficacy	Up to 87.5 LL/CW
--------------	-----------------	----------	------------------

### Power

LED power	5 W - 8 W	Circuit power	6 W - 9 W
-----------	-----------	---------------	-----------

### LED characteristics


CRI	90+	Colour temperature	3000 K 4000 K
Rated life (hours)	60 K - L70/B10		

## Compliance


UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class E		

## Dimensions


Round Version

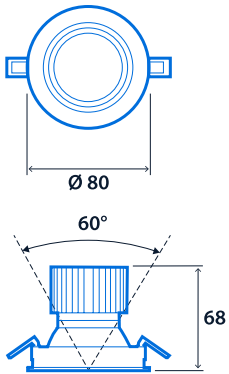

Square Version

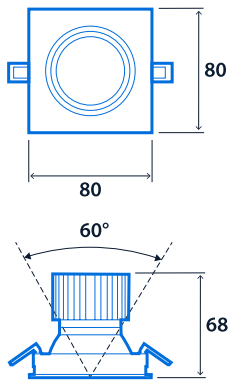

Standard Remote Driver

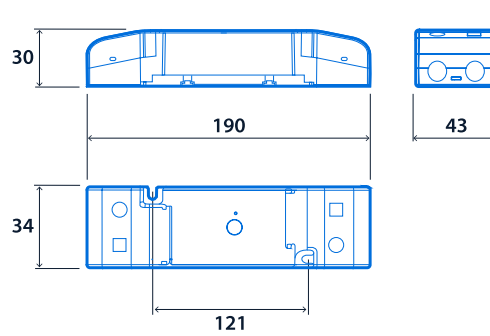

Cut-out -  $\varnothing$  75  
Minimum ceiling void - 120



Click or scan here  
View Mina-S variants using  
our online filtering tool



Information is correct as of 13 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.