

EV charging

Socket	Twin	Charging speed	7.4 kW 22 kW
Connectivity	4G Ethernet port Wi-Fi	Metering	CT clamp MID (Measuring Instruments Directive)
Recommended supply cable	3-core 16 mm ² 5-core 16 mm ²	Internal RCBO	2 x 40 A Type A 30 mA 2 pole 2 x 40 A Type A 30 mA 4 pole
Residual current device (RCD) at source	63 A - 150 mA time delayed / 300 mA - Type A minimum 2 pole 63 A - 150 mA time delayed / 300 mA - Type A minimum 4 pole		

Lighting

Lumen output (multiple)	Up to Area - 1495 lm / Pathway - 780 lm	Efficacy (multiple)	Up to Area - 59.8 LL/CW / Pathway - 55.7 LL/CW
-------------------------	---	---------------------	--

Emergency data

Emergency lumen output	190 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power (multiple)	Area - 21 W / Pathway - 11 W	Circuit power (multiple)	Area - 25 W / Pathway - 14 W
----------------------	------------------------------	--------------------------	------------------------------


LED characteristics

CRI	70+	Colour temperature	2700 K 4000 K
Rated life (hours)	100 K - L70/B10		

Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class C		

Dimensions

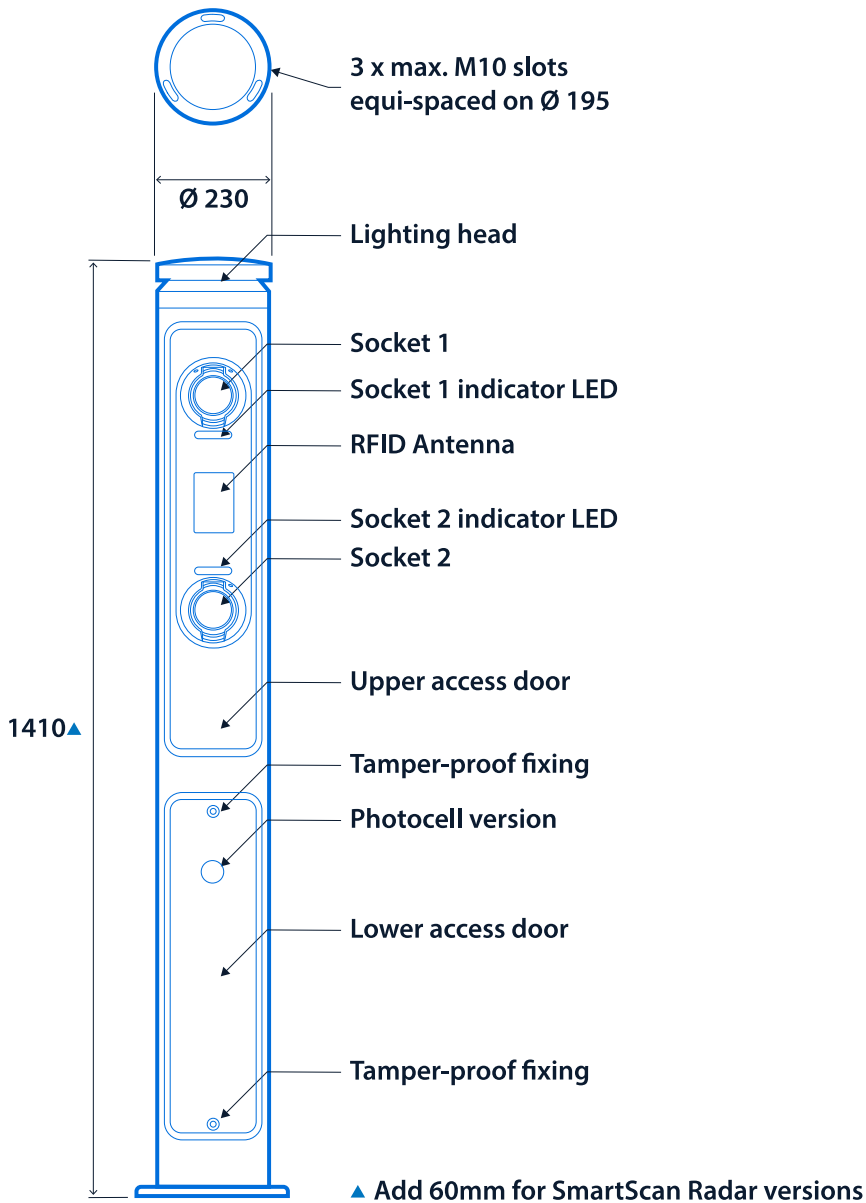



Click or scan here

View Passway EV variants
using our online filtering tool



Information is correct as of 22 Feb 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.