

## Low light level, wall mounted luminaires

Stylish IP66 wall mounted luminaires. Strong high-pressure die-cast aluminium body with injection moulded UV stabilised polycarbonate cover.

Applications: Schools, hospitals, retail and other commercial environments. Final exit door illumination.

Complements its larger brother the Realta.

- Maintained or non-maintained emergency options
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP66

IK11

68.8 LL/CW

SMARTSCAN

LUXGUARD

## Lighting management

Lighting control system	Non-dimming	Emergency system	AutoTest Emergency Non-emergency SmartScan Emergency
-------------------------	-------------	------------------	--

## Specification

Mounting	Surface	IP rating	IP66
Impact rating	IK11		

## Lighting

Lumen output	550 lm	Efficacy	68.8 LL/CW
--------------	--------	----------	------------

## Emergency data

Emergency lumen output	210 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

## Power

LED power	6 W	Circuit power	8 W
-----------	-----	---------------	-----


LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	63 K - L80/B10		

Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class B	SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724

Dimensions

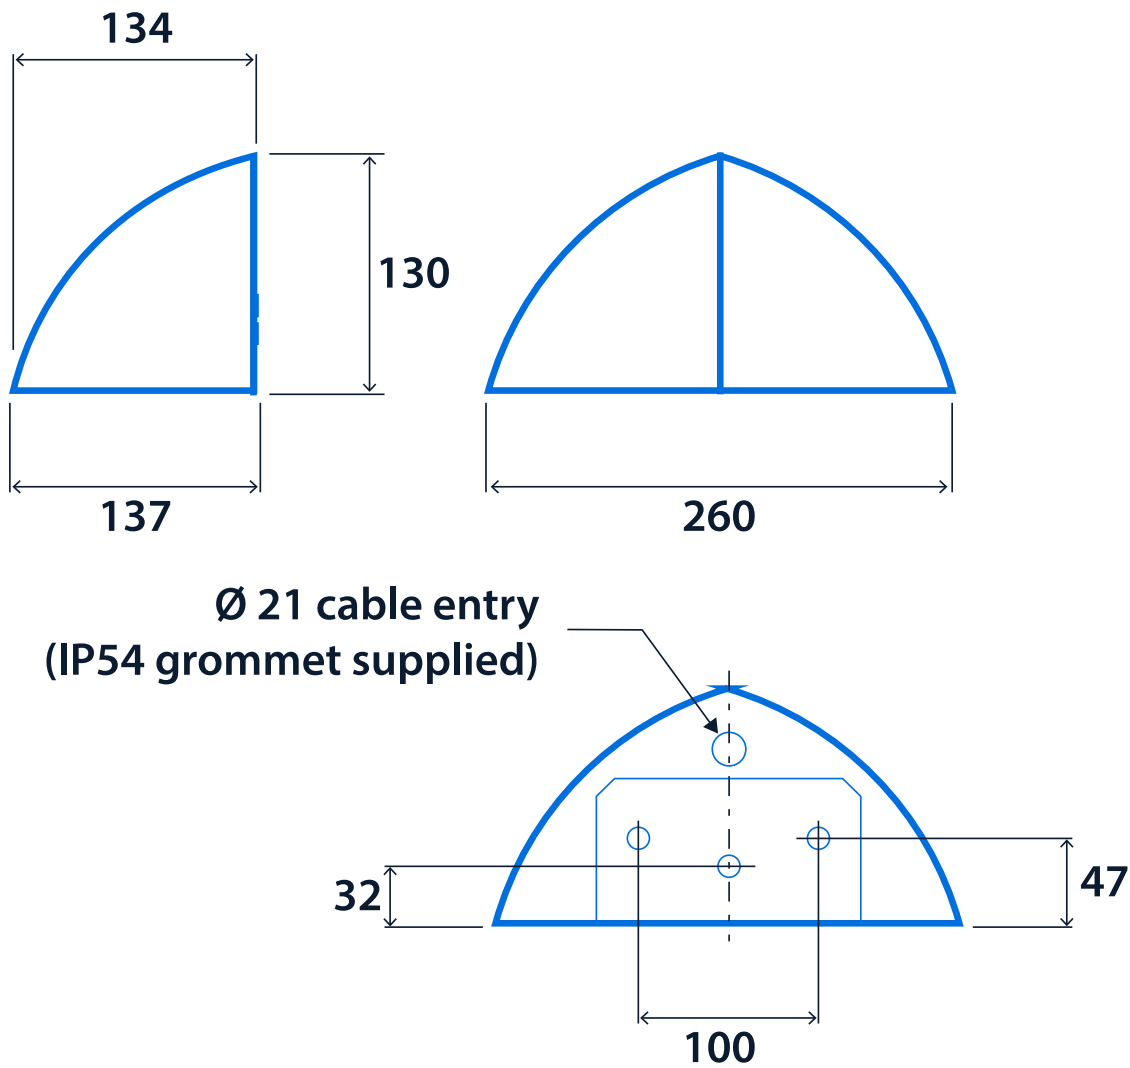

## Accessories

Product code	Description	Weight
RL15419	Wall mounting kit for 20 mm conduit - Graphite	0.4 kg
RL15419SV3	Wall mounting kit for 20 mm conduit - Silver	0.4 kg

## Spares

Product code	Description	Weight
EMB029	6 W Nickel Metal Hydride (NiMH) battery - End of life batteries can be returned to Thorlux for recycling	0.15 kg



View the range

