

Architectural surface mounted LED exit signs

Emergency exit sign luminaires with acrylic legend panel. Suitable for ceiling, wall or cantilever mounting.

Applications: commercial and retail environments.

- Low power consumption (1 W total)
- Extremely long LED lifetime, up to 100,000 hours
- Very easy battery compartment access
- Ceiling mounted with optional kits for wall and cantilever mounting
- 26 m maximum viewing distance in accordance with BS EN 1838
- Choice of legends
- Status indicator shows operational condition
- Reliable Nickel Metal Hydride (NiMH) battery technology



IP20

SMARTSCAN

Specification

| | | | |
|----------|---------|-----------|------|
| Mounting | Surface | IP rating | IP20 |
|----------|---------|-----------|------|

Emergency data

| | | | |
|-----------------------|---|--------------------------|---------|
| Legend type | EURO arrow down EURO arrow left EURO arrow left / right double sided EURO arrow right ISO 7010 arrow down ISO 7010 arrow left ISO 7010 arrow left / right double sided ISO 7010 arrow right ISO 7010 arrow up | Maximum viewing distance | 26 m |
| Emergency type | Maintained | Emergency duration | 3 hours |
| Battery specification | Nickel Metal Hydride (NiMH) | | |


Power

| | |
|-----------|-----|
| LED power | 4 W |
|-----------|-----|

Compliance

| | | | |
|------|-----|----|-----|
| UKCA | Yes | CE | Yes |
|------|-----|----|-----|

Dimensions

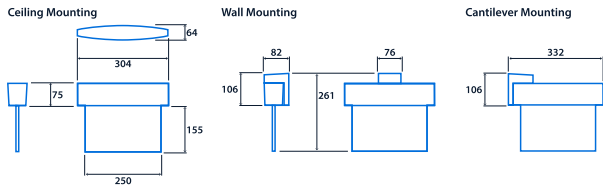

View the range



Information is correct as of 21 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.