

## Enables control of multiple DALI luminaires

Stand-alone sensor to control up to 10 DALI luminaires from one sensor. Multiple sensors can be linked using SmartScan wireless Motionline technology.

- Polycarbonate body finished white (RAL9016)
- Control the colour temperature of ColourControl luminaires (catalogue number suffixed CC)
- DALI/colour temperature control for up to 10 luminaires (assuming one DALI driver per luminaire)
- Can be used stand-alone without connected luminaires to act as a wireless booster/range extender and/or as a slave PIR to extend detection coverage
- Class II device. Earth connection provided for looping only
- Terminals suitable for 1.5 mm<sup>2</sup> looped cable
- Suitable for mounting heights up to 8 m



## Lighting management

Lighting control system **SmartScan Internal**


## Specification

IP rating **Up to IP65**

## Compliance

UKCA	Yes	CE	Yes
SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724		

## Dimensions

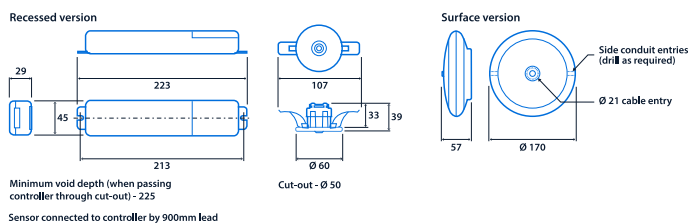



View the  
range



Information is correct as of 22 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.