

Adjustable emergency 2 W LED spotlights for open areas

IP40 adjustable emergency 2 W LED spotlights for open areas. Toughened glass lamp cover.

Applications: Ideally suited for use in areas where more conventional methods of emergency lighting are not practical.

- Three hour, maintained emergency operation
- Available with narrow (29°) or wide (63°) beam
- Adjustable lamp head
- Suitable for wall or ceiling mounting
- Simple to install, full status reporting SmartScan wireless communication versions



IP40

0 LL/CW

Specification

| | | | |
|----------|---------|-----------|------|
| Mounting | Surface | IP rating | IP40 |
|----------|---------|-----------|------|

Emergency data

| | | | |
|------------------------|---------|-----------------------|--|
| Emergency lumen output | 260 lm | Emergency type | Maintained (wire link may be removed to enable non-maintained operation) |
| Emergency duration | 3 hours | Battery specification | Nickel Metal Hydride (NiMH) |


Power

| | | | |
|-----------|-----|---------------|-----|
| LED power | 2 W | Circuit power | 2 W |
|-----------|-----|---------------|-----|

Compliance

| | | | |
|------|-----|----|-----|
| UKCA | Yes | CE | Yes |
|------|-----|----|-----|

Dimensions

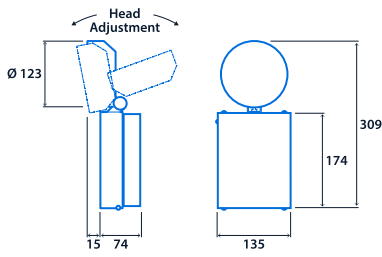

View the
range



Information is correct as of 21 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.