

## Tamper, impact and ligature-resistant surface LED luminaires

Ligature-resistant, low profile, robust and durable luminaire with impact-resistant polycarbonate cover and extruded aluminium body with die-cast ends.

Applications: Cold stores, mental health, car parks, public areas, railway stations, foot bridges and underpasses.

- Body dissipates heat, ensuring long control gear life in higher ambient temperatures
- Suitable for both individual and in-line mounting
- Complies with food production standards IFS, HACCP and BRC
- SmartScan Radar versions with sensor discretely hidden behind the cover



IP65

IK11

Up to 83.0 LL/CW

SMARTSCAN

### Specification

|                               |         |              |                   |
|-------------------------------|---------|--------------|-------------------|
| Mounting                      | Surface | IP rating    | IP65              |
| Impact rating                 | IK11    | Nominal size | 700 mm<br>1300 mm |
| Max presence detection height | 4 m     |              |                   |

### Lighting

|          |                       |              |                     |
|----------|-----------------------|--------------|---------------------|
| Optic    | Clear prismatic cover | Lumen output | 1,635 lm - 5,060 lm |
| Efficacy | Up to 83.0 LL/CW      |              |                     |

### Emergency data

|                        |         |                       |                             |
|------------------------|---------|-----------------------|-----------------------------|
| Emergency lumen output | 380 lm  | Emergency type        | Maintained                  |
| Emergency duration     | 3 hours | Battery specification | Nickel Metal Hydride (NiMH) |

### Power

|           |             |               |             |
|-----------|-------------|---------------|-------------|
| LED power | 19 W - 56 W | Circuit power | 22 W - 61 W |
|-----------|-------------|---------------|-------------|


## LED characteristics

|                    |                |                    |        |
|--------------------|----------------|--------------------|--------|
| CRI                | 80+            | Colour temperature | 4000 K |
| Rated life (hours) | 50 K - L70/B10 |                    |        |

## Compliance

|                         |  |                           |                     |
|-------------------------|--|---------------------------|---------------------|
| UKCA                    | Yes  | CE                        | Yes                 |
| Energy efficiency class | <b>This product contains a light source of energy efficiency class C</b> | Food production standards | BRC<br>HACCP<br>IFS |

## Dimensions

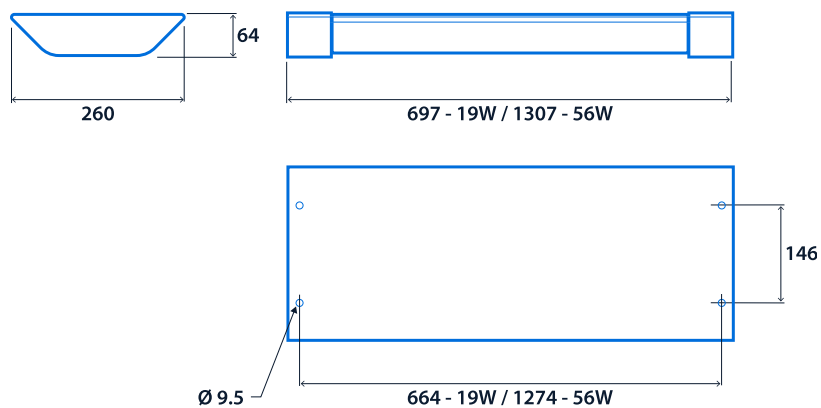



**Click or scan here**  
View Ventego variants using  
our online filtering tool



Information is correct as of 22 Feb 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.