

## Emergency luminaires for surface mounting with dedicated SmartScan wireless technology versions

LED emergency luminaires for surface mounting with SmartScan wireless communication. Superb optical performance means fewer luminaires are required. Three hour, non-maintained emergency operation. Choice of IP54 square or IP66 circular body styles.

Applications: open plan areas, corridors, storerooms, toilets etc.

- Superb photometric performance
- Low standby power consumption (1.7 W total)
- Status indicator shows operational condition
- Reliable Nickel Metal Hydride (NiMH) battery technology
- Simple to install, full status reporting SmartScan wireless communication versions



Up to IP66

0 LL/CW

SMARTSCAN

### Specification

Mounting	Surface	IP rating	Up to IP66
----------	---------	-----------	------------

### Emergency data

Emergency lumen output	235 lm - 270 lm	Emergency type	Non-maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

### Power


LED power	3 W	Circuit power	3 W
-----------	-----	---------------	-----

### Compliance


UKCA	Yes	CE	Yes
------	-----	----	-----

## Dimensions

### Square body

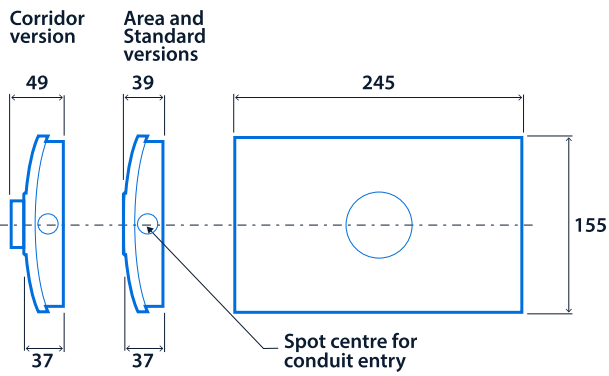

### Circular body

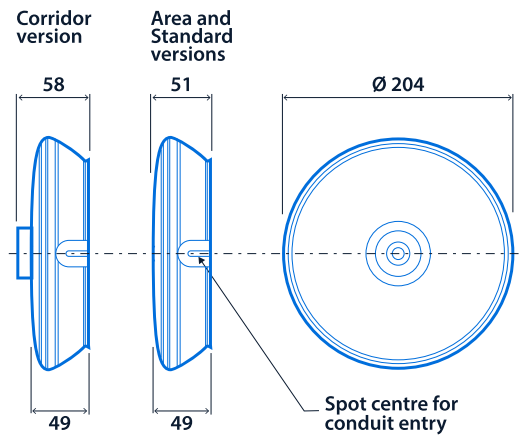

**Click or scan here**  
View Firefly Surface variants  
using our online filtering tool

